




Gear Shield Synthetic Open Gear Mill Lubricant

... developed specifically for heavily loaded mill gears operating under the most demanding conditions where a clear synthetic lubricant is preferred.



Features

- Superior viscosity - exceeds OEM requirements.
- Anti-wear and EP additives for added protection.
- Transparent (clear) on gear face.
- Drains freely from gear guards.
- Environmentally friendly. Free from all carcinogens.

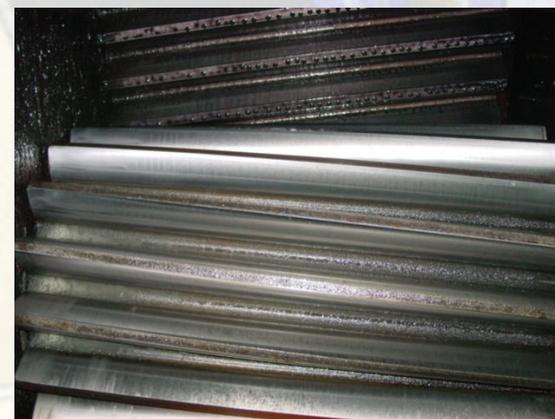

ISO 9001 Certified

16800 W. Glendale Drive, New Berlin, Wisconsin USA 53151

Tel: 262-797-4680 · Fax: 262-796-1080 · email: info@PetronCorp.com web: www.PetronCorp.com



Gear Shield Synthetic Open Gear Mill Lubricant

Property	Method	Typical Data
Color	Visual	Clear Amber
Viscosity, cSt @ 40°C (undiluted)	ASTM D445	55,100
Viscosity, cSt @ 40°C (finished)	ASTM D445	7,200
Viscosity Index	ASTM D2270	185
Flash Point, °C	ASTM D92	175
Pour Point, °C	ASTM D97	-18
4 Ball EP Weld Load, kg (undiluted)	ASTM D2596	620
4 Ball EP Weld Load, kg (finished)	ASTM D2596	500
Lincoln Ventmeter, 600 psi	Lincoln VE-1	0°F @ 30 sec.